


# K23-33 RS City

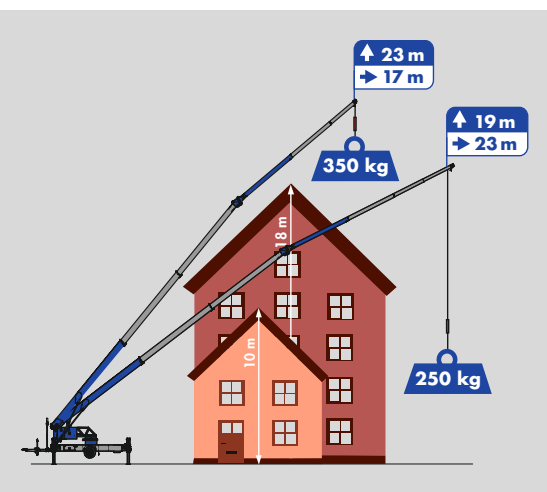

Hook height 32.8 m / Boom length 34.1 m

Max. capacity 1,500 kg

23 m Working range with 250 kg




# K23-33 RS City


## Equipment



Klaas Boom system



H-Outriggers



Automatic levelling



Twin luffing cylinders



Double derricking cylinders



Telescopic winch



Continuous rotation



Crane control system



Radio remote control




Diesel

Drive concept



Full panelling



Retractable drawbar



Self-drive mechanism (opt.)



Working platform (opt.)



Accessory fix system (opt.)



Hybrid drive (opt.)



Personal safety mode (opt.)



## Technical specifications

Hook load	1,500 kg
Hook height	32.80 m
Boom length	34.10 m
Outrigger width (min.)	2.85 m
Outrigger width (min. with HA)	3.60 m
Outrigger width (max.)	5.04 m
Winch capacity	1,500 kg
Boom (1,500 kg)	4.97 m
Extension 1 (800 kg)	8.26 m
Extension 2 (500 kg)	10.39 m
Extension 3 (250 kg)	12.31 m
Vehicle dimensions	9.24 x 2.27 x 2.59 m
Towing capacity	3.5 t


## Working range

Load	Working range	Height
1,500 kg	4.50 m	22.00 m
1,000 kg	8.50 m	20.50 m
800 kg	9.50 m	24.50 m
500 kg	14.00 m	21.50 m
350 kg	17.00 m	23.00 m
250 kg	23.00 m	19.00 m

## Working range diagram

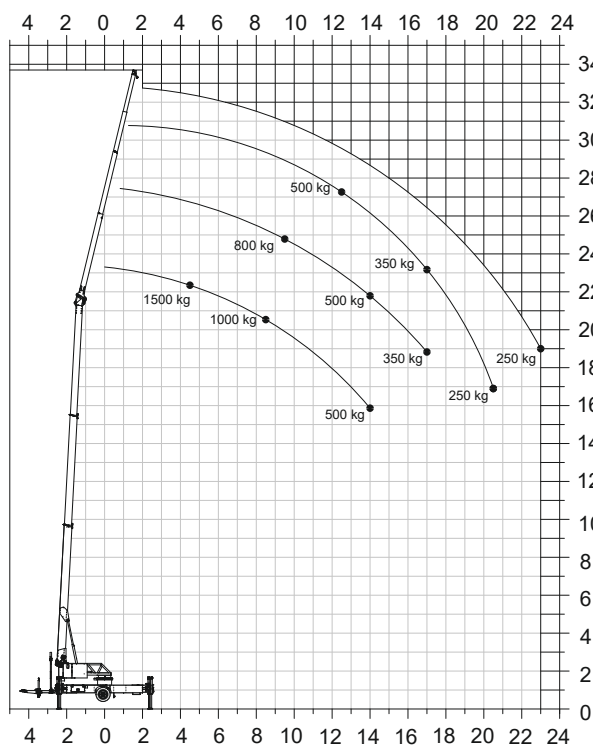

## Platform operation

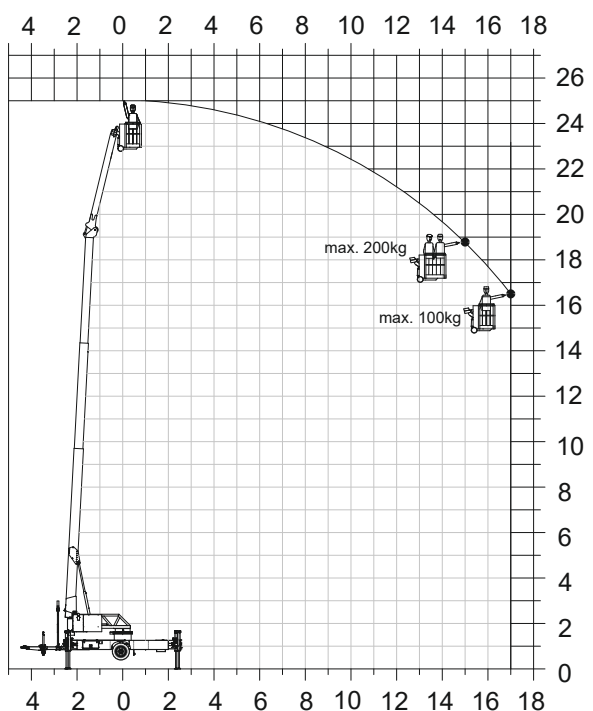

Subject to technical changes. All specifications are approximate. Changes to the functions and services are reserved. The information reflects the device performance at the time of printing.